

COMPRESSING MIXED-STATE SOURCES BY SENDING CLASSICAL INFORMATION

Emina Soljanin
Bell Labs, Lucent
Rm. 2C-177, 600 Mountain Av.
Murray Hill NJ 07974
USA
emina@lucent.com

Abstract

We consider visible compression for discrete memoryless sources of mixed quantum states when only classical information can be sent from Alice to Bob. We assume that Bob knows the source statistics, and that Alice and Bob have identical random number generators. We put in an information theoretic framework some recent results on visible compression for sources of states with commuting density operators, and remove the commutativity requirement. We derive a general achievable compression rate, which is for the noncommutative case still higher than the known lower bound. We also present several related problems of classical information theory, and show how they can be used to answer some questions of the mixed state compression problem.

Index Terms – quantum information theory, data compression, mixed-state sources.

I. INTRODUCTION

A discrete memoryless source (DMS) of information produces a sequence of independent, identically distributed random variables taking values in a finite set called the *source alphabet*. In quantum systems, source letters are mapped into *quantum states* for quantum transmission or storage. In the simplest case, quantum states correspond to unit length column vectors in a d -dimensional Hilbert space $\mathcal{H}_d$. Such quantum states are called *pure*. When $d = 2$, quantum states are called *qubits*. A column vector is denoted by $|\varphi\rangle$, its transpose by $\langle\varphi|$. A pure state is mathematically described by its *density matrix* equal to the outer product $|\varphi\rangle\langle\varphi|$. In a more complex case, a quantum state can be any of a finite number of possible pure states $|\varphi_i\rangle$ with probability p_i . Such quantum states are called *mixed*. A mixed state is also described by its density matrix which is equal to $\sum_i p_i |\varphi_i\rangle\langle\varphi_i|$. Note that a density matrix is a $d \times d$ Hermitian trace-one positive semidefinite matrix. A classical analog to a mixed state can be a multi-faced coin which turns up as any of its faces with the corresponding probability.

Compression algorithms deal with source sequences rather than individual letters. There are two possible scenarios for which algorithms can be designed: *visible* when the encoder Alice knows the source sequence and *blind* when only the quantum state corresponding to the sequence is available to her. The quantum state corresponding to a source sequence of length n has a $d^n \times d^n$ density matrix, equal to the tensor product of density matrices corresponding to the letters in the sequence. In the blind case, lossless quantum compression algorithms map (encode) these product states into states over Hilbert spaces of smaller dimension with arbitrarily high expected reconstruction (decoding) *fidelity* as $n \rightarrow \infty$. Operations used for encoding and decoding have to be allowed by quantum mechanics. In the visible case, Alice can as well compress the available classical information, which the decoder Bob can use to prepare a quantum state that (as in the blind case) approximate Alice's with arbitrarily high expected fidelity as $n \rightarrow \infty$.

The main question asks what the best compression compatible with the fidelity goal and encoding/decoding constraints for each scenario is. The answer to the question was given by Schumacher for discrete memoryless sources of pure quantum states [1]. Lossless compression of sources of possibly mixed quantum states is not yet fully understood, and is the subject of current research [2]–[7]. The optimal compression rate for the blind case scenario was found by Koashi and Imoto in [7]. A lower bound to the compression rate was established by Horodecki in [3] and by Barnum, Caves, Fuchs, Jozsa, and Schumacher in [4]. The optimal compression rates for some special cases were found by Horodecki in [2] and by Barnum, Caves, Fuchs, Jozsa, and Schumacher in [4]. More recently, an algorithm achieving the lower bound to the compression rate for the visible case of states with commuting density operators was presented by Dür, Vidal, and Cirac in [5], and a possibly related classical information theory problem was discussed by Kramer and Savari in [6]. Some of these results will be addressed in more detail after the problem we are dealing with is precisely formulated.

We are concerned with visible compression of discrete memoryless sources when only classical information can be sent from Alice to Bob. We assume that Bob knows the source statistics, and that Alice and Bob have identical random number generators. This scenario is the one studied by Dür, Vidal, and Cirac for the case of states with commuting density operators [5]. When put in an information theoretic framework, the

commutativity requirement can be easily removed, and an achievable rate can be found in the same manner. However, the derived achievable rate is still higher than the lower bound.

In the second part of the paper, we present several related problems of classical information theory, and show how they can be used to answer some questions of the mixed state compression problem. This paper is written for both information theorists and physicists, although papers written for two audiences often satisfy neither. Here writing for these two groups of scientists merely means that we tried to keep the paper as self contained as possible, and presented proofs and other material in an elementary rather than the most efficient way.

A. Problem Formulation

Let $\mathcal{X}$ be a finite set (alphabet), and $\{\rho_a | a \in \mathcal{X}\}$ a set of (possibly mixed) quantum states in a d -dimensional Hilbert space $\mathcal{H}_d$. Let $\mathcal{P}(\mathcal{X})$ be the set of all probability distributions on $\mathcal{X}$, and $P \in \mathcal{P}(\mathcal{X})$ a particular distribution. The set $\mathcal{E} = \{\rho_a, P(a) | a \in \mathcal{X}\}$ is usually referred to as an ensemble of mixed states indexed by the elements of $\mathcal{X}$. The density matrix of the ensemble $\mathcal{E}$, which we shall also refer to as the source density matrix, is given by

$$\rho = \sum_{a \in \mathcal{X}} P(a) \rho_a. \quad (1)$$

We shall assume that states ρ_a are mixtures of known (possibly nonorthogonal) pure states as follows: Let $\mathcal{Y}$ be a finite set, and $\{|\psi_b\rangle\langle\psi_b| | b \in \mathcal{Y}\}$ be a set of pure quantum states in $\mathcal{H}_d$ indexed by the elements of $\mathcal{Y}$. Let W be an $|\mathcal{X}| \times |\mathcal{Y}|$ stochastic matrix with elements $W_{ab} = W(b|a)$, $a \in \mathcal{X}$, $b \in \mathcal{Y}$, where $W(\cdot|a)$ is a probability distribution on $\mathcal{Y}$ for each $a \in \mathcal{X}$. We assume that no two states ρ_a are identical in the sense that no two rows of W are identical. The density matrices in $\mathcal{E}$ are given by

$$\rho_a = \sum_{b \in \mathcal{Y}} W(b|a) |\psi_b\rangle\langle\psi_b|, \quad a \in \mathcal{X}. \quad (2)$$

A source producing mixed states ρ_a , $a \in \mathcal{X}$, independently according to the probability distribution P , effectively produces pure states $|\psi_b\rangle\langle\psi_b|$, $b \in \mathcal{Y}$, independently according to the probability distribution Q :

$$Q(b) = \sum_{a \in \mathcal{X}} P(a) W(b|a).$$

Thus the source density matrix (1) can also be expressed in terms of $|\psi_b\rangle\langle\psi_b|$ and $Q(b)$, $b \in \mathcal{Y}$:

$$\rho = \sum_{b \in \mathcal{Y}} Q(b) |\psi_b\rangle\langle\psi_b|.$$

Example 1: A possible mixed state ensemble is shown in Fig. 1. Here $d = 2$, $|\mathcal{X}| = 2$, and $|\mathcal{Y}| = 3$.

The memoryless source produces sequences of letters, where each letter is drawn from the set $\mathcal{X}$ independently according to the probability distribution P . Thus a source sequence $\mathbf{x} = (x_1, \dots, x_n) \in \mathcal{X}^n$ occurs with probability $P(\mathbf{x}) = P(x_1) \dots P(x_n)$, and the corresponding state has a density matrix $\rho_{\mathbf{x}} = \rho_{x_1} \otimes \dots \otimes \rho_{x_n}$. On the transmitting end, the encoder Alice knows $\mathcal{E}$ and $\mathbf{x}$. On the receiving end, the decoder Bob knows $\mathcal{E}$. In addition, Alice and Bob have identical random number generators.

$$\begin{aligned}
\rho_1 &= \frac{2}{3}|\psi_1\rangle\langle\psi_1| + \frac{1}{3}|\psi_2\rangle\langle\psi_2| \\
\rho_2 &= \frac{1}{3}|\psi_2\rangle\langle\psi_2| + \frac{2}{3}|\psi_3\rangle\langle\psi_3| \\
\rho &= \frac{1}{2}\rho_1 + \frac{1}{2}\rho_2 \\
&= \frac{1}{3}|\psi_1\rangle\langle\psi_1| + \frac{1}{3}|\psi_2\rangle\langle\psi_2| + \frac{1}{3}|\psi_3\rangle\langle\psi_3| \\
&= \frac{1}{2}I
\end{aligned}$$

Fig. 1

A MIXED STATE ENSEMBLE.

For each source sequence $\mathbf{x}$, Alice prepares and sends to Bob R_n bits of classical information, which he uses (together with his prior knowledge of $\mathcal{E}$) to prepare state $\hat{\rho}_{\mathbf{x}}$. To measure how faithfully mixed state σ approximates mixed state ω and vice versa, we use the so called *mixed state fidelity* F defined as

$$F(\sigma, \omega) = \left\{ \text{Tr}[(\sqrt{\sigma}\omega\sqrt{\sigma})^{1/2}] \right\}^2, \quad (3)$$

whose maximum value is 1. We shall say that the mixed state compression is lossless when the expected value of $F(\rho_{\mathbf{x}}, \hat{\rho}_{\mathbf{x}})$ can be made arbitrarily close to 1 by increasing the length n of the source sequence:

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F(\rho_{\mathbf{x}}, \hat{\rho}_{\mathbf{x}}) \rightarrow 1 \text{ as } n \rightarrow \infty. \quad (4)$$

B. Information Measures

In compression of mixed-state sources by sending classical information, the well known classical information measures will play a role. Entropy $H(Q)$, conditional entropy $H(W/P)$, and mutual information $I(P, W)$ are defined as

$$\begin{aligned}
H(Q) &= - \sum_{b \in \mathcal{Y}} Q(b|a) \log Q(b|a) \\
H(W/P) &= - \sum_{a \in \mathcal{X}} P(a) \sum_{b \in \mathcal{Y}} W(b|a) \log W(b|a) \\
I(P, W) &= H(Q) - H(W/P)
\end{aligned} \quad (5)$$

The corresponding quantum information measures are the source Von Neumann entropy $S(\rho)$, the expected value of the Von Neumann entropies of the source letters $\bar{S}$, and the Holevo quantity χ :

$$\begin{aligned} S(\rho) &= -\text{Tr } \rho \log \rho \\ \bar{S} &= \sum_{a \in \mathcal{X}} P(a) S(\rho_a) \\ \chi &= S(\rho) - \bar{S} \end{aligned} \tag{6}$$

When $|\psi_b\rangle\langle\psi_b|$, $b \in \mathcal{Y}$, are orthogonal, the quantum quantities (6) and their classical counterparts (5) are equal:

$$\begin{aligned} S(\rho) &= H(Q) \\ \bar{S} &= H(W/P) \\ \chi &= I(P, W) \end{aligned}$$

For the classical information theory problems discussed in Sec. VI, we also need stochastic matrix U with elements $U_{ba} = U(a|b)$, $a \in \mathcal{X}$, $b \in \mathcal{Y}$, where $U(\cdot|b)$ is a probability distribution on $\mathcal{X}$ for each $b \in \mathcal{Y}$. The elements of U are computed as

$$U(a|b) = P(a)W(b|a)/Q(b).$$

Entropy $H(P)$, conditional entropy $H(U/Q)$, and mutual information $I(Q, U)$ are defined as the corresponding quantities in (5).

C. Known Results

For sources of pure quantum states, the optimal compression rate is $S(\rho)$ for both visible and blind scenarios; the information sent from Alice to Bob is quantum [1]. For sources of mixed quantum states and the fidelity criterion (4), the following has been shown: The Von Neumann entropy $S(\rho)$ is the optimal compression rate in the blind case scenario [7]; the compression algorithm is the same as in the pure case state. A lower bound to the compression rate of any compression scheme is the Holevo quantity χ [3], [4]. This lower bound can be achieved by a specific compression algorithm in the case of quantum states with commuting density operators [5]; the information sent from Alice to Bob is classical. Achievable compression rates for both visible and blind scenarios for sources of quantum states with commuting density operators and a fidelity criterion different than (4) are found in [6] (see Sec. VI-B).

When the density matrices ρ_a , $a \in \mathcal{X}$, commute, they can be made diagonal in the same basis. Thus, one can assume that they are mixtures of orthogonal pure states $|\psi_b\rangle\langle\psi_b|$, $b \in \mathcal{Y}$. We address the general case, *i.e.*, the one where the $|\psi_b\rangle\langle\psi_b|$, $b \in \mathcal{Y}$, are not necessarily orthogonal.

D. The Idea for the Compression Algorithm

The main idea is simple to state for the reader already familiar with the notion of typicality as well as the notion of joint and conditional typicality. A rigorous description, given in the proceeding sections, uses the precision provided by the method of types.

For each $\mathbf{x}$, Alice's state $\rho_{\mathbf{x}}$ is roughly a uniform mixture of pure states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}| = |\psi_{y_1}\rangle\langle\psi_{y_1}| \otimes \cdots \otimes |\psi_{y_n}\rangle\langle\psi_{y_n}|$ where $\mathbf{y}$ is conditionally W -typical with respect to $\mathbf{x}$, and some unlikely pure states. For each P -typical $\mathbf{x}$, there are about $\exp[nH(W/P)]$ such $\mathbf{y}$ s, and they are Q -typical. There are about $\exp[nH(Q)]$ Q -typical $\mathbf{y}$ s, and a randomly chosen $\mathbf{y}$ will be conditionally W -typical with respect to any P -typical $\mathbf{x}$ with probability of about $\exp[nH(W/P)]/\exp[nH(Q)] = \exp[-nI(P, W)]$. Therefore, if Bob forms a list of $\exp[nI(P, W)]$ randomly chosen Q -typical $\mathbf{y}$ s, then with high probability there will be a conditionally W -typical $\mathbf{y}$ with respect to any P -typical $\mathbf{x}$ Alice may have. If Alice and Bob use identical random number generators to form a list, Alice (who knows $\mathbf{x}$) can identify such $\mathbf{y}$ to Bob by sending about $nI(P, W)$ bits of classical information. Bob can then prepare the corresponding $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$, or an error state if no W -typical $\mathbf{y}$ was on the list. Therefore, for every P -typical $\mathbf{x}$, Bob's state $\hat{\rho}_{\mathbf{x}}$ is with high probability also a uniform mixture of pure states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$ where $\mathbf{y}$ is conditionally W -typical with respect to $\mathbf{x}$ and an unlikely error state.

The idea relies on Shannon's famous observation that "it is possible for most purposes to treat long sequences as though there were just 2^{Hn} of them, each with probability 2^{-Hn} " [8]. The limitations of this "typical sequence" approach becomes apparent when one realizes how stringent requirement the fidelity (3) is. For probability distributions (diagonal density matrices), the fidelity is essentially equivalent to the L_1 distance (see for example [11, Ch. 9]). In the scheme sketched above, every sequence on Bob's list of randomly chosen Q -typical $\mathbf{y}$ s appears with exactly the same probability. Bob's state $\hat{\rho}_{\mathbf{x}}$ is with high probability a uniform mixture of pure states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$, where $\mathbf{y}$ is conditionally W -typical with respect to $\mathbf{x}$. Alice's state $\rho_{\mathbf{x}}$, is also with high probability a mixture of the same pure states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$, but not exactly uniform.

Thus for formal proofs, we use a simple refinement of the method of typical sequences, known as the method of types [9], [10]. Two sequences over some alphabet $\mathcal{A}$ have the same type if each letter in $\mathcal{A}$ appears in both of them the same number of times. All sequences of the same type form a type class. We partition the set of typical sequences into type classes. Sequences of the same type are equiprobable for a DMS, and Bob can form a list of sequences randomly chosen from the same type class. Now he will be dealing with a single type class at the time rather than the entire set of typical sequences. He has to know which type class to choose, but Alice can send that information to him at no cost to the compression rate asymptotically since the number of type classes is polynomial in n . An additional benefit of using the method of types will be the speed of convergence to 1 of the fidelity when $n \rightarrow \infty$. When two or more sets of sequences are involved (as $\mathcal{X}^n$ and $\mathcal{Y}^n$ above), joint and conditional types have to be considered.

II. FIDELITY OF MIXED QUANTUM STATES

A. Fidelity and Trace Distance

Besides computing the mixed state fidelity (3), one can measure how close state σ is to state ω by computing the *trace distance*

$$D(\sigma, \omega) = \frac{1}{2} \text{Tr} |\sigma - \omega|.$$

Here $|A|$ denotes the positive square root of $A^\dagger A$, i.e., $|A| = \sqrt{A^\dagger A}$. The trace distance and the fidelity are closely related and the following holds:

$$1 - F(\sigma, \omega) \leq D(\sigma, \omega) \leq \sqrt{1 - F(\sigma, \omega)^2}. \quad (7)$$

The trace distance is a metric on the space of density operators, and therefore the triangle inequality is true:

$$D(\sigma, \omega) \leq D(\sigma, \tau) + D(\tau, \omega). \quad (8)$$

It has some other useful properties, as well. When we need one of those properties, we shall switch from the fidelity to the trace distance and back by making use of the inequalities (7).

Since we shall have to estimate the trace distance of a mixture of inputs, the following property, known as *strong convexity*, will be useful: Let $\{p_i\}$ and $\{q_i\}$ be probability distributions over some index set, and ω_i and σ_i density operators also indexed by the same index set. Then

$$D\left(\sum_i p_i \omega_i, \sum_i q_i \sigma_i\right) \leq D(\{p_i\}, \{q_i\}) + \sum_i p_i D(\omega_i, \sigma_i). \quad (9)$$

From strong convexity, it directly follows that the trace distance is jointly convex in its arguments:

$$D\left(\sum_i p_i \omega_i, \sum_i p_i \sigma_i\right) \leq \sum_i p_i D(\omega_i, \sigma_i). \quad (10)$$

All the above properties of the mixed state fidelity and trace distance and some additional are discussed in the excellent survey [11, Ch. 9].

B. Approximating Density Matrices

The objective of the compression algorithm described in Sec. IV-A is to leave Bob with states that faithfully approximate Alice's. Only two types of approximations will be used, which we can already demonstrate by just using the above properties of the fidelity and the trace distance.

Let σ and σ_e be two density matrices, $p_{e,n}$ a sequence of numbers such that $p_{e,n} \rightarrow 0$ as $n \rightarrow \infty$, and ω_n defined as follows:

$$\omega_n = p_{e,n} \sigma_e + (1 - p_{e,n}) \sigma.$$

Lemma 1: Let σ and ω_n be as defined above. Then $F(\sigma, \omega_n) \rightarrow 1$ as $n \rightarrow \infty$.

Proof: By properties (7), and strong convexity of the trace distance (9), we have

$$\begin{aligned} F(\sigma, \omega_n) &\geq 1 - D(\sigma, \omega_n) \\ &\geq 1 - \frac{1}{2}|0 - p_{e,n}| - \frac{1}{2}|1 - (1 - p_{e,n})| - D(\sigma, \sigma) \\ &\geq 1 - p_{e,n}. \end{aligned}$$

■

Let $\mathcal{Y}$ be a finite set and $\pi_n \in \mathcal{P}(\mathcal{Y}^n)$ a probability distribution on $\mathcal{Y}^n$. Let $\{\sigma_{\mathbf{y}}, \pi_n(\mathbf{y}) | \mathbf{y} \in \mathcal{Y}^n\}$ be an ensemble of (possibly mixed) states over Hilbert space $\mathcal{H}_d^{\otimes n}$. Consider the following density matrix σ_n :

$$\sigma_n = \sum_{\mathbf{y} \in \mathcal{Y}^n} \pi_n(\mathbf{y}) \sigma_{\mathbf{y}}.$$

Let $\mathcal{B}_n \subseteq \mathcal{Y}^n$ be a probabilistically large set: $\pi_n(\mathcal{B}_n) = 1 - \epsilon_n$, where $\epsilon_n \rightarrow 0$ as $n \rightarrow \infty$. It is intuitively clear that if we replace states $\sigma_{\mathbf{y}}, \mathbf{y} \in \mathcal{Y}^n \setminus \mathcal{B}_n$, in the expression for σ_n by a fixed state σ_e , we obtain a density matrix which faithfully represents σ_n in the sense of (3) when $n \rightarrow \infty$. To prove a slightly stronger result (which we shall use in Sec. IV-C), we proceed as follows.

Consider

$$\begin{aligned} \sigma_n &= \sum_{\mathbf{y} \in \mathcal{Y}^n} \pi_n(\mathbf{y}) \sigma_{\mathbf{y}} \\ &= \sum_{\mathbf{y} \in \mathcal{B}_n} \pi_n(\mathbf{y}) \sigma_{\mathbf{y}} + \sum_{\mathbf{y} \in \mathcal{Y}^n \setminus \mathcal{B}_n} \pi_n(\mathbf{y}) \sigma_{\mathbf{y}} \end{aligned}$$

Let $p_{e,n}$ be a sequence of numbers such that $p_{e,n} \rightarrow 0$ as $n \rightarrow \infty$, and $\hat{\sigma}_{\mathbf{y}}, \mathbf{y} \in \mathcal{Y}^n$, a set of density matrices such that $D(\sigma_{\mathbf{y}}, \hat{\sigma}_{\mathbf{y}}) \leq p_{e,n}$ for all $\mathbf{y}$. We define a density matrix ω_n as

$$\omega_n = \sum_{\mathbf{y} \in \mathcal{B}_n} \pi_n(\mathbf{y}) \hat{\sigma}_{\mathbf{y}} + \sum_{\mathbf{y} \in \mathcal{Y}^n \setminus \mathcal{B}_n} \pi_n(\mathbf{y}) \sigma_e$$

Lemma 2: Let σ_n and ω_n be as defined above. Then $F(\sigma_n, \omega_n) \rightarrow 1$ as $n \rightarrow \infty$.

Proof: By properties (7), and joint convexity of the trace distance (10), we have

$$\begin{aligned} F(\sigma_n, \omega_n) &\geq 1 - D(\sigma_n, \omega_n) \\ &\geq 1 - \sum_{\mathbf{y} \in \mathcal{B}_n} \pi_n(\mathbf{y}) D(\sigma_{\mathbf{y}}, \hat{\sigma}_{\mathbf{y}}) + \sum_{\mathbf{y} \in \mathcal{Y}^n \setminus \mathcal{B}_n} \pi_n(\mathbf{y}) D(\sigma_{\mathbf{y}}, \sigma_e) \\ &\geq 1 - (1 - \epsilon_n/2)p_{e,n} - \epsilon_n > 1 - p_{e,n} - \epsilon_n. \end{aligned}$$

■

III. THE METHOD OF TYPES

A. Types and Typical Sequences

Let, as before, $\mathcal{X}$ be a finite set and $\mathcal{P}(\mathcal{X})$ the set of all probability distributions on $\mathcal{X}$. Given a sequence $\mathbf{x} = \{x_1, \dots, x_n\} \in \mathcal{X}^n$ and a letter $a \in \mathcal{X}$, let $N(a|\mathbf{x})$ denote the number occurrences of a in $\mathbf{x}$.

Definition 1: The *type* of a sequence $\mathbf{x} \in \mathcal{X}^n$ is the distribution $P_{\mathbf{x}} \in \mathcal{P}(\mathcal{X})$ given by

$$P_{\mathbf{x}}(a) = \frac{1}{n} N(a|\mathbf{x}) \text{ for every } a \in \mathcal{X}.$$

Conversely, the *type class* of a distribution $P \in \mathcal{P}(\mathcal{X})$ is the set T_P^n of all sequences of type P in $\mathcal{X}^n$:

$$T_P^n = \{\mathbf{x} : \mathbf{x} \in \mathcal{X}^n \text{ and } P_{\mathbf{x}} = P\}.$$

The subset of $\mathcal{P}(\mathcal{X})$ consisting of the possible types of sequences $\mathbf{x} \in \mathcal{X}^n$ is denoted by $\mathcal{P}_n(\mathcal{X})$. It is easy to show by elementary combinatorics that

$$|\mathcal{P}_n(\mathcal{X})| = \binom{n + |\mathcal{X}| - 1}{|\mathcal{X}| - 1} \leq (n + 1)^{|\mathcal{X}|}.$$

Therefore, there is only a polynomial (in n) number of types.

The size of T_P^n can be bounded as follows:

Lemma 3: [10, pp. 30] For any type $P_{\mathbf{x}}$ of sequences in $\mathcal{X}^n$

$$(n + 1)^{-|\mathcal{X}|} \exp\{nH(P_{\mathbf{x}})\} \leq |T_{P_{\mathbf{x}}}^n| \leq \exp\{nH(P_{\mathbf{x}})\}.$$

Definition 2: For any distribution P on $\mathcal{X}$, a sequence $\mathbf{x} \in \mathcal{X}^n$ is *P-typical* with constant δ if

$$\left| \frac{1}{n} N(a|\mathbf{x}) - P(a) \right| \leq \delta \text{ for every } a \in \mathcal{X},$$

and no $a \in \mathcal{X}$ with $P(a) = 0$ occurs in $\mathbf{x}$. The set of such sequences will be denoted by $T_{P,\delta}^n$, and the set of their types by $\mathcal{P}_n^{P,\delta}(\mathcal{X})$.

Lemma 4: [10, p. 34] For any distribution P on $\mathcal{X}$, we have

$$P^n(T_{P,\delta}^n) \geq 1 - \frac{|\mathcal{X}|}{4n\delta^2}. \quad (11)$$

B. Joint and Conditional Types

If $\mathcal{X}$ and $\mathcal{Y}$ are two finite sets, the *joint type* of a pair of sequences $\mathbf{x} \in \mathcal{X}^n$ and $\mathbf{y} \in \mathcal{Y}^n$ is defined as a type of the sequence $\{(\mathbf{x}_1, \mathbf{y}_1), \dots, (\mathbf{x}_n, \mathbf{y}_n)\} \in \mathcal{X} \times \mathcal{Y}$. Namely, it is the distribution $P_{\mathbf{x},\mathbf{y}} \in \mathcal{P}(\mathcal{X} \times \mathcal{Y})$ given by

$$P_{\mathbf{x},\mathbf{y}}(a, b) = \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y}.$$

Joint types are often given in terms of the type of $\mathbf{x}$ and a stochastic matrix $V : \mathcal{X} \rightarrow \mathcal{Y}$ as

$$P_{\mathbf{x},\mathbf{y}}(a, b) = P_{\mathbf{x}}(a) V(b|a) \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y}.$$

Definition 3: We say that $\mathbf{y} \in \mathcal{Y}^n$ has *conditional type* V given $\mathbf{x} \in \mathcal{X}^n$ if

$$N(a, b|\mathbf{x}, \mathbf{y}) = N(a|\mathbf{x})V(b|a) \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y}.$$

For any given $\mathbf{x} \in \mathcal{X}^n$ and a stochastic matrix $V: \mathcal{X} \rightarrow \mathcal{Y}$, the set of sequences $\mathbf{y} \in \mathcal{Y}^n$ having conditional type V given $\mathbf{x}$ is called *V-shell* of $\mathbf{x}$, and is denoted by $T_V^n(\mathbf{x})$ or simply by $T_V(\mathbf{x})$. The set of all conditional types of $\mathbf{y} \in \mathcal{Y}$ for a given $\mathbf{x}$ will be denoted by $\mathcal{V}_n(\mathcal{Y}, \mathbf{x})$.

The size of a V-shell can be bounded as follows:

Lemma 5: [10, pp. 31] For any type $P_{\mathbf{x}}$ of sequences in $\mathcal{X}^n$ and stochastic matrix V such that $T_V(\mathbf{x})$ is not empty:

$$(n+1)^{-|\mathcal{X}||\mathcal{Y}|} \exp\{nH(V|P_{\mathbf{x}})\} \leq |T_V(\mathbf{x})| \leq \exp\{nH(V|P_{\mathbf{x}})\}.$$

Clearly, every $\mathbf{y}$ in the V-shell of an $\mathbf{x}$ in the type class $T_{P_{\mathbf{x}}}^n$ has the same type $P_{\mathbf{y}}$:

$$P_{\mathbf{y}}(b) = \sum_{a \in \mathcal{X}} P_{\mathbf{x}}(a)V(b|a).$$

However, by Lemmas 3 and 5, we immediately see that $T_V(\mathbf{x})$ is “exponentially smaller” than T_P , unless all rows of V are equal to $P_{\mathbf{y}}$:

$$(n+1)^{-|\mathcal{X}||\mathcal{Y}|} \exp\{-nI(P_{\mathbf{x}}, V)\} \leq \frac{|T_V(\mathbf{x})|}{|T_{P_{\mathbf{y}}}|} \leq (n+1)^{|\mathcal{Y}|} \exp\{-nI(P_{\mathbf{x}}, V)\}. \quad (12)$$

Definition 4: For any given $\mathbf{x} \in \mathcal{X}^n$ and a stochastic matrix $W: \mathcal{X} \rightarrow \mathcal{Y}$, sequence $\mathbf{y} \in \mathcal{Y}^n$ is *W-generated* by $\mathbf{x}$ (or *W-typical* under the condition $\mathbf{x}$) with constant δ' if

$$\left| \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) - \frac{1}{n} N(a|\mathbf{x})W(b|a) \right| \leq \delta' \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y},$$

and $N(a, b|\mathbf{x}, \mathbf{y}) = 0$ whenever $W(b|a) = 0$. The set of such sequences will be denoted by $T_{W, \delta'}^n(\mathbf{x})$, and the set of their conditional types by $\mathcal{V}_n^{W, \delta'}(\mathcal{Y}, \mathbf{x})$.

Lemma 6: [10, p. 34] For any stochastic matrix $W: \mathcal{X} \rightarrow \mathcal{Y}$, we have

$$W^n(T_{W, \delta'}^n(\mathbf{x})|\mathbf{x}) = 1 - \frac{|\mathcal{X}||\mathcal{Y}|}{4n\delta'^2}.$$

C. Conditional Typical States

Let ρ_a be the density matrix of mixed state a given by (2). We consider $\rho_{\mathbf{x}} = \rho_{x_1} \otimes \cdots \otimes \rho_{x_n}$ for $\mathbf{x} \in T_{P_{\mathbf{x}}}^n$:

$$\begin{aligned} \rho_{\mathbf{x}} &= \left(\sum_{b \in \mathcal{Y}} W(b|x_1) |\psi_b\rangle \langle \psi_b| \right) \otimes \cdots \otimes \left(\sum_{b \in \mathcal{Y}} W(b|x_n) |\psi_b\rangle \langle \psi_b| \right) \\ &= \sum_{\mathbf{y} \in \mathcal{Y}^n} W(y_1|x_1) \cdots W(y_n|x_n) |\psi_{y_1}\rangle \langle \psi_{y_1}| \otimes \cdots \otimes |\psi_{y_n}\rangle \langle \psi_{y_n}| \\ &= \sum_{\mathbf{y} \in \mathcal{Y}^n} W^n(\mathbf{y}|\mathbf{x}) |\Psi_{\mathbf{y}}\rangle \langle \Psi_{\mathbf{y}}|, \end{aligned}$$

where $W^n(\mathbf{y}|\mathbf{x})$ denotes $W(y_1|x_1) \cdot \dots \cdot W(y_n|x_n)$ and $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$ denotes $|\psi_{y_1}\rangle\langle\psi_{y_1}| \otimes \dots \otimes |\psi_{y_n}\rangle\langle\psi_{y_n}|$. We define partial density matrices $\rho_{\mathbf{x}}(V)$ corresponding to each V -shell in $\mathcal{V}_n(\mathcal{Y}, \mathbf{x})$ as follows:

$$\rho_{\mathbf{x}}(V) = \sum_{\mathbf{y} \in T_V(\mathbf{x})} \frac{1}{|T_V(\mathbf{x})|} |\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|.$$

Now we can write $\rho_{\mathbf{x}}$ as

$$\rho_{\mathbf{x}} = \sum_{V \in \mathcal{V}_n^{W, \delta'}(\mathcal{Y}, \mathbf{x})} W^n(T_V(\mathbf{x})|\mathbf{x}) \rho_{\mathbf{x}}(V) + \sum_{V \in \mathcal{V}_n(\mathcal{Y}, \mathbf{x}) \setminus \mathcal{V}_n^{W, \delta'}(\mathcal{Y}, \mathbf{x})} W^n(T_V(\mathbf{x})|\mathbf{x}) \rho_{\mathbf{x}}(V), \quad (13)$$

where the first term includes only the conditionally typical V -shells (W -generated by $\mathbf{x}$), and the second term takes care of the rest.

We are now ready to describe a mixed state compression algorithm. We shall see that for every typical $\mathbf{x}$, the algorithm leaves Bob with mixed state $\hat{\rho}_{\mathbf{x}}$ which differs from Alice's $\rho_{\mathbf{x}}$ of (13) only in the following: In the first term of (13), $\rho_{\mathbf{x}}(V)$ is approximated by $\hat{\rho}_{\mathbf{x}}(V)$ in the sense of Lemma 1, in the second term of (13), $\rho_{\mathbf{x}}(V)$ is simply replaced by some fixed error-state $\rho_{e, \mathbf{x}}$. Consequently, $\rho_{\mathbf{x}}$ is approximated by $\hat{\rho}_{\mathbf{x}}$ in the sense of Lemma 2.

IV. MIXED STATE COMPRESSION

A. The Algorithm

Alice and Bob have identical random number generators.

1. Alice is given a visible source sequence $\mathbf{x} \in \mathcal{X}^n$.
2. For every $\mathbf{a} \in \mathcal{X}$, Alice determines $N(\mathbf{a}|\mathbf{x})$, *i.e.* the type $P_{\mathbf{x}}$.
3. If $P_{\mathbf{x}}$ is not in $\mathcal{P}_n^{P, \delta}(\mathcal{X})$, *i.e.*, $\mathbf{x}$ is not P -typical with constant δ , Alice sends an error indicator, and Bob prepares some fixed error-state ρ_e . Otherwise, they proceed as follows:
4. Alice chooses a conditional type for sequence $\mathbf{y}$, say V , at random with probability $W^n(T_V(\mathbf{x}))$. If V is not in $\mathcal{V}_n^{W, \delta'}(\mathcal{Y}, \mathbf{x})$, *i.e.*, $\mathbf{y}$ is not W -generated by $\mathbf{x}$ with constant δ' , Alice sends an error indicator, and Bob prepares some fixed error-state $\rho_{e, \mathbf{x}}$. (Here $\rho_{e, \mathbf{x}}$ and $\rho_{e, \mathbf{x}}(V)$ below do not depend on $\mathbf{x}$ and V since Bob does not have that information. The notation signifies the stage in the algorithm). Otherwise, they proceed as follows:
5. Alice determines type $P_{\mathbf{y}}$ by computing

$$P_{\mathbf{y}}(b) = \sum_{\mathbf{a} \in \mathcal{X}} P_{\mathbf{x}}(\mathbf{a}) V(b|\mathbf{a}).$$

6. Alice tells the type $P_{\mathbf{y}}$ to Bob by sending $\log |\mathcal{P}_n(\mathcal{Y})|$ bits identifying the particular $P_{\mathbf{y}}$.
7. Alice and Bob each form a list of N_l sequences $\mathbf{y}$ by drawing randomly from the type class $T_{P_{\mathbf{y}}}$. Let

$$R = \frac{\log N_l}{n}.$$

8. If there is one or more $\mathbf{y}$'s on the list belonging to the V -shell $T_V(\mathbf{x})$, Alice sends $\log N_l$ bits to Bob identifying the position of first $\mathbf{y} \in T_V(\mathbf{x})$ on the list, and Bob prepares $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$. With some probability

$p_{e,\mathbf{x}}(V)$, no $\mathbf{y} \in T_V(\mathbf{x})$ will be on the list that Alice and Bob form. If that is the case, Alice sends an error indicator and Bob prepares some fixed error-state $\rho_{e,\mathbf{x}}(V)$.

B. Bob's Density Matrix

For non-typical $\mathbf{x}$, Bob's state is ρ_e , while for typical $\mathbf{x}$, his state is given by

$$\hat{\rho}_{\mathbf{x}} = \sum_{V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y},\mathbf{x})} W^n((T_V(\mathbf{x})|\mathbf{x})\hat{\rho}_{\mathbf{x}}(V) + \sum_{V \in \mathcal{V}_n(\mathcal{Y},\mathbf{x}) \setminus \mathcal{V}_n^{W,\delta'}(\mathcal{Y},\mathbf{x})} W^n((T_V(\mathbf{x})|\mathbf{x})\rho_{e,\mathbf{x}}, \quad \mathbf{x} \in T_{P,\delta}^n.$$

Here $\hat{\rho}_{\mathbf{x}}(V)$ denotes Bob's density matrix when conditional type V is chosen by Alice. Since Bob prepares either the error-state $\rho_{e,\mathbf{x}}(V)$ with probability $p_{e,\mathbf{x}}(V)$, or one of the states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$, $\mathbf{y} \in T_V(\mathbf{x})$, with probability $1 - p_{e,\mathbf{x}}(V)$, we have

$$\hat{\rho}_{\mathbf{x}}(V) = p_{e,\mathbf{x}}(V)\rho_{e,\mathbf{x}}(V) + (1 - p_{e,\mathbf{x}}(V)) \sum_{\mathbf{y} \in T_V(\mathbf{x})} \frac{1}{|T_V(\mathbf{x})|} |\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|.$$

Note that if $p_{e,\mathbf{x}}(V) \rightarrow 0$ as $n \rightarrow \infty$, then Bob's $\hat{\rho}_{\mathbf{x}}(V)$ approximates Alice's $\rho_{\mathbf{x}}(V)$ in the sense of Lemma 1, and thus Bob's $\hat{\rho}_{\mathbf{x}}$ approximates Alice's $\rho_{\mathbf{x}}$ in the sense of Lemma 2.

To see under which conditions $p_{e,\mathbf{x}}(V) \rightarrow 0$ as $n \rightarrow \infty$, we proceed as follows: Clearly, the probability that a sequence $\mathbf{y}$ randomly drawn from $T_{P_{\mathbf{y}}}$ is in $T_V(\mathbf{x})$ equals to $|T_V(\mathbf{x})|/|T_{P_{\mathbf{y}}}|$. The probability $p_{e,\mathbf{x}}(V)$ that no such sequence is on the list of length N_l is thus equal to $(1 - |T_V(\mathbf{x})|/|T_{P_{\mathbf{y}}}|)^{N_l}$. This quantity can be bound by applying the inequality $(1 - x)^k \leq e^{-kx}$, and then the ratio $|T_V(\mathbf{x})|/|T_{P_{\mathbf{y}}}|$ can be bound by applying the inequalities (12):

$$\begin{aligned} p_{e,\mathbf{x}}(V) &= (1 - |T_V(\mathbf{x})|/|T_{P_{\mathbf{y}}}|)^{N_l} \\ &\leq e^{-N_l |T_V(\mathbf{x})|/|T_{P_{\mathbf{y}}}|} \\ &\leq e^{-\exp(n(R-I-\epsilon_n''))}, \end{aligned}$$

where I refers to $I(P_{\mathbf{x}}, V)$ and $\epsilon_n'' = |\mathcal{X}||\mathcal{Y}|\log(n+1)/n$. Therefore, if

$$R > I(P_{\mathbf{x}}, V) + \epsilon_n'', \quad (14)$$

we have $p_{e,\mathbf{x}}(V) \rightarrow 0$ as $n \rightarrow \infty$.

C. Mixed State Fidelity

We now have all we need to bound the value of $\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x})F(\rho_{\mathbf{x}}, \hat{\rho}_{\mathbf{x}})$, and thus prove the main result of the compression algorithm:

Theorem 1: Let $R > I(P_{\mathbf{x}}, V) + \epsilon_n''$, for all $P_{\mathbf{x}} \in \mathcal{P}_n(\mathcal{Y})$ and all $V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y},\mathbf{x})$. Then

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x})F(\rho_{\mathbf{x}}, \hat{\rho}_{\mathbf{x}}) \rightarrow 1 \text{ as } n \rightarrow \infty.$$

Proof: By Lemma 4,

$$\begin{aligned}
\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) &\geq 1 - \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) D(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) \\
&= 1 - \sum_{\mathbf{x} \in T_{P,\delta}^n} P(\mathbf{x}) D(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) - \sum_{\mathbf{x} \in \mathcal{X}^n \setminus T_{P,\delta}^n} P(\mathbf{x}) D(\boldsymbol{\rho}_{\mathbf{x}}, \rho_e) \\
&\geq 1 - \sum_{\mathbf{x} \in T_{P,\delta}^n} P(\mathbf{x}) D(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) - \epsilon_n,
\end{aligned} \tag{15}$$

where $\epsilon_n = |\mathcal{X}|/(2n\delta^2)$. By Lemma 6,

$$\begin{aligned}
D(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) &= \sum_{V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})} W^n((T_V(\mathbf{x})|\mathbf{x})D(\boldsymbol{\rho}_{\mathbf{x}}(V), \hat{\boldsymbol{\rho}}_{\mathbf{x}}(V))) + \sum_{V \in \mathcal{V}_n(\mathcal{Y}, \mathbf{x}) \setminus \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})} W^n((T_V(\mathbf{x})|\mathbf{x})D(\boldsymbol{\rho}_{\mathbf{x}}(V), \hat{\boldsymbol{\rho}}_{e,\mathbf{x}})) \\
&\leq \sum_{V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})} W^n((T_V(\mathbf{x})|\mathbf{x})D(\boldsymbol{\rho}_{\mathbf{x}}(V), \hat{\boldsymbol{\rho}}_{\mathbf{x}}(V))) + \epsilon'_n,
\end{aligned} \tag{16}$$

where $\epsilon'_n = |\mathcal{X}||\mathcal{Y}|/(2n\delta'^2)$. By Lemma 1,

$$D(\boldsymbol{\rho}_{\mathbf{x}}(V), \hat{\boldsymbol{\rho}}_{\mathbf{x}}(V)) \leq p_{e,\mathbf{x}}(V). \tag{17}$$

Let $p_{e,n}$ denote the maximum of all $p_{e,\mathbf{x}}(V)$ over all $\mathbf{x} \in T_{P,\delta}^n$ and $V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})$. Combining (15), (16), and (17), we obtain

$$\begin{aligned}
\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) &\geq 1 - (1 - \epsilon_n)(1 - \epsilon'_n)p_{e,n} - (1 - \epsilon_n)\epsilon'_n - \epsilon_n \\
&> 1 - p_{e,n} - \epsilon'_n - \epsilon_n
\end{aligned}$$

As $n \rightarrow \infty$, we know that $\epsilon_n \rightarrow 0$ and $\epsilon'_n \rightarrow 0$, whereas $p_{e,n} \rightarrow 0$ when the compression rate satisfies (14) for all $\mathbf{x} \in T_{P,\delta}^n$ and $V \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})$. Therefore, under the conditions of the Theorem, we have

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F(\boldsymbol{\rho}_{\mathbf{x}}, \hat{\boldsymbol{\rho}}_{\mathbf{x}}) \rightarrow 1 \text{ as } n \rightarrow \infty.$$

■

D. Achievable Compression Rate

To show that a compression rate of $I(P, W)$ is achievable, we use the continuity of entropy:

Lemma 7: If $\{p_i\}_{i=1}^N$ and $\{q_i\}_{i=1}^N$ are two probability distributions such that

$$\sum_{i=1}^N |p_i - q_i| \leq \theta \leq \frac{1}{2},$$

then

$$|H(p_1, \dots, p_N) - H(q_1, \dots, q_N)| \leq -\theta \log \frac{\theta}{N}.$$

We show that for all $\mathbf{x} \in \mathcal{T}_{\mathbf{p},\delta}^n$ and $\mathbf{V} \in \mathcal{V}_n^{W,\delta'}(\mathcal{Y}, \mathbf{x})$,

$$|I(\mathbf{P}, \mathbf{W}) - I(\mathbf{P}_\mathbf{x}, \mathbf{V})| \rightarrow 0 \text{ as } \delta, \delta' \rightarrow 0.$$

Consider

$$\begin{aligned} |I(\mathbf{P}, \mathbf{W}) - I(\mathbf{P}_\mathbf{x}, \mathbf{V})| &\leq |H(\mathbf{Q}) - H(\mathbf{P}_\mathbf{y})| + |H(\mathbf{W}|\mathbf{P}) - H(\mathbf{V}|\mathbf{P}_\mathbf{x})| \\ &\leq |H(\mathbf{Q}) - H(\mathbf{P}_\mathbf{y})| + |H(\mathbf{W}|\mathbf{P}) - H(\mathbf{W}|\mathbf{P}_\mathbf{x})| + |H(\mathbf{W}|\mathbf{P}_\mathbf{x}) - H(\mathbf{V}|\mathbf{P}_\mathbf{x})| \\ &\leq -|\mathcal{X}||\mathcal{Y}|(\delta + \delta') \log[(\delta + \delta')|\mathcal{X}|] + \delta \log |\mathcal{Y}| - |\mathcal{X}||\mathcal{Y}|\delta' \log \delta' \end{aligned} \quad (18)$$

To bound the first and the third term in (18), we used the continuity of entropy (Lemma 7), and to bound the second term, we used the $\log |\mathcal{Y}|$ bound on the entropy of any distribution over $\mathcal{Y}$.

V. APPLICATIONS

A. The Example of Fig. 1

We consider the system of Example 1 as shown in Fig. 1. Let h denote the binary entropy function: $h(x) = -x \log(x) - (1-x) \log(1-x)$.

For the classical information measures, we have

$$\begin{aligned} H(\mathbf{Q}) &= \log 3 \\ H(\mathbf{P}|\mathbf{W}) &= h(1/3) = -2/3 + \log 3 \\ I(\mathbf{P}, \mathbf{W}) &= 2/3 \end{aligned}$$

For the quantum information measures, we have

$$\begin{aligned} S(\rho) &= 1 \\ \bar{S} &= h(1/2 - \sqrt{3}/6) \\ \chi &= 1 - h(1/2 - \sqrt{3}/6) = .255 \dots \end{aligned}$$

Note the gap between $I(\mathbf{P}, \mathbf{W})$ and χ .

B. Sources of Mixed States with Commuting Density Operators

When the density matrices ρ_α , $\alpha \in \mathcal{X}$, commute, they can be made diagonal in the same basis. Thus, we shall assume that they are mixtures of orthogonal pure states $|\psi_b\rangle\langle\psi_b|$, $b \in \mathcal{Y}$:

$$\rho_\alpha = \sum_{b \in \mathcal{Y}} W(b|\alpha) |\psi_b\rangle\langle\psi_b|, \quad \alpha \in \mathcal{X}.$$

Recall that

$$\rho = \sum_{\alpha \in \mathcal{X}} P(\alpha) \rho_\alpha = \sum_{b \in \mathcal{Y}} Q(b) |\psi_b\rangle\langle\psi_b|.$$

Since $|\psi_b\rangle\langle\psi_b|$ are orthogonal, we have $S(\rho) = H(Q)$, and $\sum_{a \in \mathcal{X}} P(a)S(\rho_a) = H(W/P)$. Therefore, the Holevo quantity χ is in this case equal to the mutual information $I(P, W)$:

$$\chi = S(\rho) - \sum_{a \in \mathcal{X}} P(a)S(\rho_a) = H(Q) - H(W/P) = I(P, W).$$

A way to ensure that Bob's matrices $\hat{\rho}_x$ commute is to assign the uniform mixture of pure states $|\Psi_y\rangle\langle\Psi_y|$, $y \in \mathcal{Y}^n$, to each error-state in the compression algorithm:

$$\rho_e = \rho_{e,x} = \rho_{e,n} = \frac{1}{|\mathcal{Y}|^n} \sum_{y \in \mathcal{Y}^n} |\Psi_y\rangle\langle\Psi_y|. \quad (19)$$

Of course, no particular choice of the error-states is required if the only goal is an asymptotically good fidelity. However, commutativity of Bob's matrices keeps the entire system classical, makes it easier to derive an expression for the fidelity, and consequently puts us in a good position to recognize possible related problems of classical information theory.

For each sequence x , Alice's density matrix is

$$\rho_x = \sum_{y \in \mathcal{Y}^n} W^n(y|x) |\Psi_y\rangle\langle\Psi_y|.$$

With assignment (19), the compression algorithm leaves Bob with the density matrix

$$\hat{\rho}_x = \sum_{y \in \mathcal{Y}^n} \hat{W}^n(y|x) |\Psi_y\rangle\langle\Psi_y|.$$

Therefore, the mixed state fidelity between ρ_x and $\hat{\rho}_x$ is

$$\begin{aligned} F(\rho_x, \hat{\rho}_x) &= \left\{ \text{Tr}[(\sqrt{\rho_x} \hat{\rho}_x \sqrt{\rho_x})^{1/2}] \right\}^2 = \left\{ \text{Tr}[(\rho_x \hat{\rho}_x)^{1/2}] \right\}^2 \\ &= \left\{ \text{Tr}[\left(\sum_{y \in \mathcal{Y}^n} W^n(y|x) \hat{W}^n(y|x) |\Psi_y\rangle\langle\Psi_y| \right)^{1/2}] \right\}^2 \\ &= \left[\sum_{y \in \mathcal{Y}^n} \sqrt{W^n(y|x) \cdot \hat{W}^n(y|x)} \right]^2. \end{aligned}$$

VI. CONNECTIONS WITH CLASSICAL PROBLEMS

We discuss three problems of classical information theory, each to a certain degree related to the problem of visible mixed state compression.

A. Sources of Probability Distributions

We consider a discrete memoryless source whose alphabet is a set of $|\mathcal{X}|$ coins with $|\mathcal{Y}|$ faces. When coin C_a is tossed, face b appears with probability $W(b|a)$, $a \in \mathcal{X}$, $b \in \mathcal{Y}$. The source, Alice, produces sequences of coins, *i.e.*, probability distributions, where each coin is drawn independently according to the probability distribution P . A source whose alphabet consists of two probability distribution is described in the following example:

Example 2: A source of two biased coins is shown in Fig. 2. If coin C_1 is tossed, the probability of getting

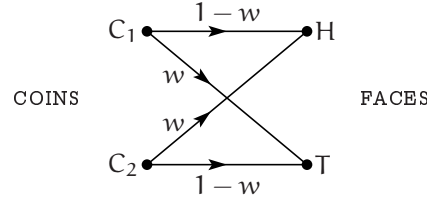


Fig. 2

SOURCE.

a tail is w , if coin C_2 is tossed, the probability of getting a head is w .

When the n coins in Alice's sequence $C_x = \{C_{x_1}, \dots, C_{x_n}\}$ are tossed, the probability of getting sequence $\mathbf{y} \in \mathcal{Y}^n$ of faces is $W^n(\mathbf{y}|\mathbf{x}) = W(y_1|x_1) \dots W(y_n|x_n)$. Each time Alice is given sequence of coins C_x , the reproducing source Bob prepares sequence of faces $\mathbf{y} \in \mathcal{Y}^n$ with probability $\widehat{W}^n(\mathbf{y}|\mathbf{x})$ such that

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F_{\mathcal{Y}^n}(W^n(\cdot|\mathbf{x}), \widehat{W}^n(\cdot|\mathbf{x})) \rightarrow 1 \text{ as } n \rightarrow \infty. \quad (20)$$

Here $F_{\mathcal{Y}^n}(\cdot, \cdot)$ is the Bhattacharyya-Wooters overlap between two probability distributions over the set $\mathcal{Y}^n$:

$$F_{\mathcal{Y}^n}(W^n(\cdot|\mathbf{x}), \widehat{W}^n(\cdot|\mathbf{x})) = \left[\sum_{\mathbf{y} \in \mathcal{Y}^n} \sqrt{W^n(\mathbf{y}|\mathbf{x}) \cdot \widehat{W}^n(\mathbf{y}|\mathbf{x})} \right]^2.$$

Requirement (20), ensures that Alice and Bob appear to be identical sources of probability distributions to an observer who can see only the sequences of faces at both ends. More precisely, with probability approaching 1 as n increases, such observer can not tell the difference between Alice and Bob. We immediately see that goal (20) can be achieved by running the compression algorithm described in Sec. IV.

B. Type Covering

We again consider the source of the previous section, whose alphabet is a set of $|\mathcal{X}|$ coins with $|\mathcal{Y}|$ faces. But now, for each Alice's sequence C_x of coins, Bob prepares a predetermined sequence $\mathbf{y}(\mathbf{x})$ of faces such that

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) \rightarrow 1 \text{ as } n \rightarrow \infty.$$

Here $F_{\mathcal{X} \times \mathcal{Y}}(\cdot, \cdot)$ is the Bhattacharyya-Wooters overlap between two probability distributions over the set $\mathcal{X} \times \mathcal{Y}$:

$$\begin{aligned} F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) &= \left[\sum_{(a,b) \in \mathcal{X} \times \mathcal{Y}} \sqrt{P_{\mathbf{x}}(a) W(b|a) \cdot P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}(a,b)} \right]^2 \\ &= \left[\sum_{(a,b) \in \mathcal{X} \times \mathcal{Y}} \frac{1}{n} \sqrt{N(a|\mathbf{x}) W(b|a) \cdot N(a,b|\mathbf{x}, \mathbf{y}(\mathbf{x}))} \right]^2. \end{aligned} \quad (21)$$

This problem was translated into a rate distortion one, and solved for perfect and imperfect asymptotic fidelity in [6]. By using only simple combinatorial techniques, we will show that $I(P, W)$ is the optimal rate for perfect asymptotic fidelity.

We first show that the overlap (21) is close to 1 if and only if $\mathbf{y}(\mathbf{x})$ is W -generated by $\mathbf{x}$ with some constant δ close to 0. We prove this claim in the following two lemmas by using the inequalities (7), which bound the fidelity in terms of the trace distance and vice versa.

Lemma 8: Let $\mathbf{y}(\mathbf{x})$ be W -generated by $\mathbf{x}$ with constant δ :

$$\left| \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) - \frac{1}{n} N(a|\mathbf{x}) W(b|a) \right| \leq \delta \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y}. \quad (22)$$

Then

$$F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) \rightarrow 1, \text{ as } \delta \rightarrow 0.$$

Proof: By (7), we can bound the Bhattacharyya-Wooters overlap (21) in terms of the corresponding trace distance:

$$\begin{aligned} F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) &= \left[\sum_{(a,b) \in \mathcal{X} \times \mathcal{Y}} \frac{1}{n} \sqrt{N(a|\mathbf{x}) W(b|a) \cdot N(a, b|\mathbf{x}, \mathbf{y}(\mathbf{x}))} \right]^2 \\ &\geq 1 - \frac{1}{2} \sum_{(a,b) \in \mathcal{X} \times \mathcal{Y}} \left| \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) - \frac{1}{n} N(a|\mathbf{x}) W(b|a) \right|. \end{aligned}$$

Because of (22), we have

$$F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) \geq 1 - \delta \cdot |\mathcal{X}| |\mathcal{Y}| / 2. \quad \blacksquare$$

Lemma 9: Let Bhattacharyya-Wooters overlap (21) be equal to $1 - \alpha/2$. Then sequence $\mathbf{y}(\mathbf{x})$ is W -generated by $\mathbf{x}$ with constant $2\sqrt{\alpha}$.

Proof: By (7), we can bound the trace distance between the distributions $P_{\mathbf{x}} W(\cdot|\cdot)$ and $P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}$ in terms of their Bhattacharyya-Wooters overlap (21):

$$\frac{1}{2} \sum_{(a,b) \in \mathcal{X} \times \mathcal{Y}} \left| \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) - \frac{1}{n} N(a|\mathbf{x}) W(b|a) \right| \leq [1 - F_{\mathcal{X} \times \mathcal{Y}}^2(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})})]^{1/2} \leq \sqrt{\alpha}.$$

It follows that

$$\left| \frac{1}{n} N(a, b|\mathbf{x}, \mathbf{y}) - \frac{1}{n} N(a|\mathbf{x}) W(b|a) \right| \leq 2\sqrt{\alpha} \text{ for every } a \in \mathcal{X}, b \in \mathcal{Y}. \quad \blacksquare$$

Therefore, for a given $\mathbf{x}$, the fidelity (21) is close to 1 if and only if $\mathbf{y}(\mathbf{x})$ is W -generated by $\mathbf{x}$ with some constant δ close to 0. A compression code $\mathcal{C} \subseteq \mathcal{Y}^n$ will have to contain at least one such $\mathbf{y}(\mathbf{x})$ for each $\mathbf{x} \in T_{P, \delta \mathbf{x}}$, as shown next.

Definition 5: We shall say that code $\mathcal{C} \subseteq \mathcal{Y}^n$ of face sequences *covers* set $\mathcal{B} \subseteq \mathcal{X}^n$ of coin sequences with constant δ if it contains at least one element of $T_{W, \delta}^n(\mathbf{x})$, for each $\mathbf{x} \in \mathcal{B}$, i.e., for each $\mathbf{x} \in \mathcal{B}$, we have $\mathcal{C} \cap T_{W, \delta}^n(\mathbf{x}) \neq \emptyset$.

Theorem 2: Let $\mathcal{C}$ be a code which covers the set $T_{P, \delta_{\mathbf{x}}}$. For each $\mathbf{x} \in \mathcal{X}^n$, let $\mathbf{y}(\mathbf{x})$ be an element of $\mathcal{C} \cap T_{W, \delta}^n(\mathbf{x})$ if $\mathbf{x} \in T_{P, \delta_{\mathbf{x}}}$, and $\mathbf{y}(\mathbf{x})$ be an arbitrary $\mathbf{y}_e \in \mathcal{Y}^n$, otherwise. Then

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) \rightarrow 1 \text{ as } n \rightarrow \infty.$$

Proof: By Lemmas 4 and 8,

$$\sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F_{\mathcal{X} \times \mathcal{Y}}(P_{\mathbf{x}} W(\cdot|\cdot), P_{\mathbf{x}, \mathbf{y}(\mathbf{x})}) \geq \left(1 - \frac{|\mathcal{X}|}{4n\delta_{\mathbf{x}}^2}\right) \left(1 - \frac{\delta|\mathcal{X}||\mathcal{Y}|}{2}\right).$$

■

We assume that Alice and Bob both know the compression code $\mathcal{C}$. To identify $\mathbf{y}(\mathbf{x})$, Alice has to send to Bob $\log |\mathcal{C}|$ bits of classical information. The compression rate is, therefore, given by

$$R = \frac{\log |\mathcal{C}|}{n},$$

and is determined by the size of the smallest code $\mathcal{C}$ that covers $T_{P, \delta}$. To bound the size of $\mathcal{C}$, we shall use the following simple general result about coverings, known as Johnson-Stein-Lovász Theorem (see for example [12, p. 322]):

Theorem 3: Let $\mathbf{A}$ be a 0–1 matrix with N rows and M columns. Assume that each row contains at least v ones and each column at most a ones. Then there exists an $N \times K$ submatrix $\mathbf{C}$ of $\mathbf{A}$ with

$$K \leq \frac{N}{a} + \frac{M}{v} \log a \leq \frac{M}{v} (1 + \log a)$$

such that $\mathbf{C}$ contains no all-zero rows.

In order to use Theorem 3 in bounding compression code rate R , we construct matrix $\mathbf{A}$ as follows: The rows of $\mathbf{A}$ are indexed by sequences $\mathbf{x}$ that are P -typical with constant $\delta_{\mathbf{x}}$, columns by sequences $\mathbf{y}$ that are Q -typical with constant $\delta_{\mathbf{y}}$. Thus $\mathbf{A}$ has $|T_{P, \delta_{\mathbf{x}}}|$ rows and $|T_{Q, \delta_{\mathbf{y}}}|$ columns. An element of $\mathbf{A}$ in row $\mathbf{x}$ and column $\mathbf{y}$ is set to 1 if $\mathbf{x}$ and $\mathbf{y}$ are jointly typical with constant $\delta_{\mathbf{x}\mathbf{y}}$, *i.e.*, if

$$|P(a)W(b|a) - \frac{1}{n}N(a, b|\mathbf{x}, \mathbf{y})| = |Q(a)U(b|a) - \frac{1}{n}N(a, b|\mathbf{x}, \mathbf{y})| \leq \delta_{\mathbf{x}\mathbf{y}},$$

otherwise to 0. We first show that all $\mathbf{y}$ s corresponding to the 1s in a particular row $\mathbf{x}$ are W -generated by $\mathbf{x}$ with constant $\delta = \delta_{\mathbf{x}} + \delta_{\mathbf{x}\mathbf{y}}$: For each row $\mathbf{x}$ having a 1 in column $\mathbf{y}$, we have

$$\begin{aligned} |P_{\mathbf{x}}(b)W(b|a) - \frac{1}{n}N(a, b|\mathbf{x}, \mathbf{y})| &\leq |P_{\mathbf{x}}(b)W(b|a) - P(a)W(b|a)| + |P(a)W(b|a) - \frac{1}{n}N(a, b|\mathbf{x}, \mathbf{y})| \\ &\leq \delta_{\mathbf{x}} + \delta_{\mathbf{x}\mathbf{y}} = \delta. \end{aligned}$$

Therefore $\mathbf{y} \in T_{W, \delta}^n(\mathbf{x})$. Since $\mathbf{C}$ is a submatrix of $\mathbf{A}$ with no all-zero rows, the set $\mathcal{C}$ of sequences $\mathbf{y}$ indexing the columns of $\mathbf{C}$ covers the set $T_{P, \delta_{\mathbf{x}}}^n$. Therefore, by Theorem 2, $\mathcal{C}$ can serve as a compression code asymptotically achieving perfect fidelity.

We find ν , a lower bound to the number of 1's in each row as follows: For each $\mathbf{x}$, consider all sequences $\mathbf{y}$ which are W -generated by $\mathbf{x}$ with constant δ' . If δ' is set to be equal to $\delta_{\mathbf{x}\mathbf{y}} - \delta_{\mathbf{x}}$, we have

$$\begin{aligned} |P(\mathbf{a})W(\mathbf{b}|\mathbf{a}) - \frac{1}{n}N(\mathbf{a}, \mathbf{b}|\mathbf{x}, \mathbf{y})| &\leq |P(\mathbf{a})W(\mathbf{b}|\mathbf{a}) - P_{\mathbf{x}}(\mathbf{a})W(\mathbf{b}|\mathbf{a})| + |P_{\mathbf{x}}(\mathbf{a})W(\mathbf{b}|\mathbf{a}) - \frac{1}{n}N(\mathbf{a}, \mathbf{b}|\mathbf{x}, \mathbf{y})| \\ &\leq \delta_{\mathbf{x}} + \delta' = \delta_{\mathbf{x}\mathbf{y}}. \end{aligned}$$

Thus, if $\mathbf{y} \in T_{W, \delta'}^n(\mathbf{x})$, the element of $\mathbf{A}$ in row $\mathbf{x}$ and column $\mathbf{y}$ is set to 1. Therefore, the number of 1's in each row is at least ν :

$$\nu = \exp[n(H(W/P) - \epsilon')].$$

We find α , an upper bound to the number of 1's in each column as follows: For each column $\mathbf{y}$ having a 1 in row $\mathbf{x}$, we have

$$\begin{aligned} |P_{\mathbf{y}}(\mathbf{b})U(\mathbf{a}|\mathbf{b}) - \frac{1}{n}N(\mathbf{a}, \mathbf{b}|\mathbf{x}, \mathbf{y})| &\leq |P_{\mathbf{y}}(\mathbf{b})U(\mathbf{a}|\mathbf{b}) - Q(\mathbf{b})U(\mathbf{a}|\mathbf{b})| + |Q(\mathbf{b})U(\mathbf{a}|\mathbf{b}) - \frac{1}{n}N(\mathbf{a}, \mathbf{b}|\mathbf{x}, \mathbf{y})| \\ &\leq \delta_{\mathbf{y}} + \delta_{\mathbf{x}\mathbf{y}}. \end{aligned}$$

Therefore $\mathbf{x} \in T_{U, \delta''}^n(\mathbf{y})$, $\delta'' = \delta_{\mathbf{y}} + \delta_{\mathbf{x}\mathbf{y}}$, and thus the number of 1's in each column is at most α :

$$\alpha = \exp[n(H(U/Q) + \epsilon'')].$$

Theorem 3 gives an upper bound on K , the number of columns in $\mathcal{C}$ and thus the code rate

$$R = \frac{\log K}{n}.$$

Since $M = |T_{Q, \delta_{\mathbf{y}}}^n| \leq \exp[n(H(Q) + \epsilon_{\mathbf{y}})]$, we have

$$\begin{aligned} K &\leq \frac{M}{\nu} (1 + \log \alpha) \\ &\leq \exp[n(H(Q) - H(W/P) + \epsilon_{\mathbf{y}} + \epsilon')] \cdot [1 + n(H(U/Q) + \epsilon'')]. \end{aligned}$$

Now, for any $N \times K$ submatrix of $\mathbf{A}$ with no all-zero rows, we have $K \cdot \alpha \geq N \cdot 1$, and thus

$$\begin{aligned} K &\geq \frac{N}{\alpha} \\ &\geq \exp[n(H(P) - H(U/Q) + \epsilon_{\mathbf{x}} - \epsilon'')]. \end{aligned}$$

Therefore, the compression R is bounded by

$$I(P, W) + \epsilon_{\mathbf{x}} - \epsilon'' \leq R \leq I(P, W) + \epsilon_{\mathbf{y}} + \epsilon' + \frac{\log[1 + n(H(U/Q) + \epsilon'')]}{n},$$

where $\epsilon_{\mathbf{x}}, \epsilon_{\mathbf{y}}, \epsilon', \epsilon'' \rightarrow 0$, as $n \rightarrow \infty$, and the compression rate $I(P, W)$ is asymptotically optimal.

Let us now compare the compression problem in this section with the earlier one in Sec. VI-A. In the earlier case, for each Alice's sequence of coins $\mathbf{x}$, Bob most likely chooses one of the approximately $\exp\{nH(W/P)\}$ sequences of faces W -generated by $\mathbf{x}$, each one with roughly the same probability. In the case we just

considered, for each Alice's $\mathbf{x}$, Bob's sequence of faces will always be a fixed sequence $\mathbf{y}(\mathbf{x})$, W -generated by $\mathbf{x}$. Note that in both cases, after a $\mathbf{y} \in T_{W,\delta}^n(\mathbf{x})$ has been identified for Bob, his uncertainty about $\mathbf{x}$ reduces from $H(P)$ to $H(U/Q)$; hence the same compression rate.

To an observer who can see only the sequences of faces at both ends, Alice and Bob now do not appear to be identical sources for any rate of compression R smaller than the entropy $H(Q)$: Bob has about $\exp(nR)$ different, equally likely face-sequences of length n whereas Alice has about $\exp(nH(Q))$. For each Alice's $\mathbf{x}$, for quantum transmission or storage, Bob can prepare the quantum state $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$ instead of the sequence of faces $\mathbf{y}$. In the scenario of Sec. VI-A, his state is roughly a uniform mixture of pure states $|\Psi_{\mathbf{y}}\rangle\langle\Psi_{\mathbf{y}}|$ where each $\mathbf{y}$ is W -generated by $\mathbf{x}$, whereas in the scenario of this section, his state is the pure state $|\Psi_{\mathbf{y}(\mathbf{x})}\rangle\langle\Psi_{\mathbf{y}(\mathbf{x})}|$.

C. Channel Coding and Lossy Mixed State Compression

The Bhattacharyya distance is in classical information theory most commonly known for its role in bounding the error-probability of a discrete memoryless channel (DMC): Consider a DMC with input alphabet $\mathcal{X}$, output alphabet $\mathcal{Y}$, and transition probabilities $W(b|a)$, $a \in \mathcal{X}$, $b \in \mathcal{Y}$. When sequence $\mathbf{x} \in \mathcal{X}^n$ has been transmitted, the probability that the maximum likelihood detector finds sequence $\mathbf{x}' \in \mathcal{X}^n$ more likely is smaller than

$$\sum_{\mathbf{y} \in \mathcal{Y}^n} \sqrt{W^n(\mathbf{y}|\mathbf{x})W^n(\mathbf{y}|\mathbf{x}')}.$$

This bound is known as the *Bhattacharyya bound* and its negative logarithm as the Bhattacharyya distance between sequences $\mathbf{x}$ and $\mathbf{x}'$. The probability of error for the maximum likelihood decoder can then be bounded in terms of the rate of the channel code used for transmission. One way to derive such bound is by solving a special rate distortion problem. We state the problem below and describe its connection with particular lossy mixed state compression. For its application to channel coding, we refer the reader to [13] or textbooks [10, pp. 185, 193] and [14, pp. 408–410].

Consider a lossy mixed state compression problem where both the original source Alice and the reproduction source Bob have the same alphabet $\mathcal{X}$. The fidelity between sequences $\mathbf{x}$ and $\mathbf{x}'$ is the Bhattacharyya-Wooters overlap between $W^n(\cdot|\mathbf{x})$ and $W^n(\cdot|\mathbf{x}')$:

$$F(\mathbf{x}, \mathbf{x}') = \left[\sum_{\mathbf{y} \in \mathcal{Y}^n} \sqrt{W^n(\mathbf{y}|\mathbf{x})W^n(\mathbf{y}|\mathbf{x}')} \right]^2. \quad (23)$$

Let $\mathcal{C} \subseteq \mathcal{X}^n$ be a reproduction code. We encode source sequence $\mathbf{x} \in \mathcal{X}^n$ by choosing the codeword $\hat{\mathbf{x}}$ which maximizes the fidelity $F(\mathbf{x}, \hat{\mathbf{x}})$. Let $F(\mathbf{x}|\mathcal{C})$ denote this maximum fidelity:

$$F(\mathbf{x}|\mathcal{C}) = \max_{\hat{\mathbf{x}} \in \mathcal{C}} F(\mathbf{x}, \hat{\mathbf{x}}),$$

and $F(\mathcal{C})$, the expected fidelity achieved with code $\mathcal{C}$:

$$F(\mathcal{C}) = \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x})F(\mathbf{x}|\mathcal{C}).$$

We are interested in finding out how the fidelity $F(\mathcal{C})$ depends on the rate of code $\mathcal{C}$.

We get the answer to the question through the following rate distortion problem. Let again source and reproduction alphabet be $\mathcal{X}$. Define a single-letter distortion measure between a source letter a and a reproduction letter a' to be the Bhattacharyya distance between the letters:

$$d_W(a, a') = -\log \sum_{b \in \mathcal{Y}} \sqrt{W(b|a)W(b|a')}, \quad a, a' \in \mathcal{X}.$$

To make the distortion finite, we shall assume that any two coins have at least one common face, *i.e.*, for all $a, a' \in \mathcal{X}$, there is a $b \in \mathcal{Y}$ such that $W(b|a) > 0$ and $W(b|a') > 0$. Thus, we have

$$0 \leq d_W(a, a') \leq d_0, \quad a, a' \in \mathcal{X}.$$

Because of our assumption that W has no identical rows, $d_W(a, a') = 0$ iff $a = a'$.

The distortion between sequences is the average of the per letter distortion between elements of the sequences:

$$\begin{aligned} d_W(\mathbf{x}, \mathbf{x}') &= \frac{1}{n} \sum_{i=1}^n d(x_i, x'_i) = -\frac{1}{n} \log \prod_{i=1}^n \left[\sum_{b \in \mathcal{Y}} \sqrt{W(b|x_i)W(b|x'_i)} \right] \\ &= -\frac{1}{n} \log \sum_{\mathbf{y} \in \mathcal{Y}^n} \sqrt{W^n(\mathbf{y}|\mathbf{x})W^n(\mathbf{y}|\mathbf{x}')}, \quad \mathbf{x}, \mathbf{x}' \in \mathcal{X}^n. \end{aligned}$$

The fidelity (23) is therefore given by

$$F(\mathbf{x}, \mathbf{x}') = \exp(-2nd_W(\mathbf{x}, \mathbf{x}')).$$

Note that if the distortion between two sequences remains strictly positive as n increases, the fidelity between them approaches 0.

Let $\mathcal{C} \subseteq \mathcal{X}^n$ be a reproduction code. We encode source sequence $\mathbf{x} \in \mathcal{X}^n$ by choosing the codeword $\hat{\mathbf{x}}$ that minimizes the distortion $d(\mathbf{x}, \hat{\mathbf{x}})$. Let $d(\mathbf{x}|\mathcal{C})$ denote this minimum distortion:

$$d(\mathbf{x}|\mathcal{C}) = \min_{\hat{\mathbf{x}} \in \mathcal{C}} d(\mathbf{x}, \hat{\mathbf{x}}),$$

and $d(\mathcal{C})$, the expected distortion achieved with code $\mathcal{C}$:

$$d(\mathcal{C}) = \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) d(\mathbf{x}, \mathcal{C}).$$

Let V be an $|\mathcal{X}| \times |\mathcal{X}|$ stochastic matrix with elements $V_{aa'} = V(a'|a)$, $a, a' \in \mathcal{X}$, and let

$$d(V) = \sum_{a, a' \in \mathcal{X}} P(a) V(a'|a) d(a, a').$$

be the *average distortion* associated with V . The *rate distortion function* of a DMS with generic distribution P is given by

$$R(D) = \max_{V: d(V) \leq D} I(P, V).$$

Its significance, found by Shannon in [15], is expressed by the source coding theorem and its converse (see [14, pp. 397–400] for the form used here). Before stating the theorem and its application to our problem, we compute the distortion measure $d_W(\cdot, \cdot)$ and the rate distortion function for the source of Example 2.

Example 3: Consider again the source shown in Fig. 2. We have

$$d_W(C_1, C_2) = -\log \sqrt{4p(1-p)} \text{ and } d_W(\mathbf{x}, \mathbf{x}') = \frac{1}{n} D_H(\mathbf{x}, \mathbf{x}') \cdot d_W(C_1, C_2),$$

where $D_H(\mathbf{x}, \mathbf{x}')$ is the Hamming distance between sequences $\mathbf{x}$ and $\mathbf{x}'$. The rate distortion function is given by

$$R(D) = H(P) - h(D/d_W(C_1, C_2)).$$

Note that $R(0) = H(P)$, which is true in general under our assumptions.

Theorem 4: [14, pp. 397–400] *Source Coding Theorem and its Converse*

For any block length n and rate R , there exists a block code $\mathcal{C} \subseteq \mathcal{X}^n$ with average distortion $d(\mathcal{C})$ satisfying

$$d(\mathcal{C}) \leq D + d_0 e^{-nE(R,D)},$$

where $E(R, D) > 0$ for $R > R(D)$. Conversely, no source code for which $d(\mathcal{C}) \leq D$ has rate smaller than $R(D)$.

We use this result to show how the fidelity $F(\mathcal{C})$ depends on the rate of code $\mathcal{C}$:

Theorem 5: For any block length n and rate $R > H(P)$, a rate R block code $\mathcal{C} \subseteq \mathcal{X}^n$ exists such that the fidelity $F(\mathcal{C}) \rightarrow 1$ as $n \rightarrow \infty$. Conversely, for any code $\mathcal{C} \subseteq \mathcal{X}^n$ with rate $R < H(P)$, $F(\mathcal{C}) \rightarrow 0$ as $n \rightarrow \infty$.

Proof: By the Source Coding Theorem 4, we have

$$\begin{aligned} F(\mathcal{C}) &= \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) F(\mathbf{x}|\mathcal{C}) \\ &= \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) \exp(2nd_W(\mathbf{x}|\mathcal{C})) \\ &\geq \sum_{\mathbf{x} \in \mathcal{X}^n} P(\mathbf{x}) (1 - nd_W(\mathbf{x}|\mathcal{C})) \\ &\geq 1 - nd_0 e^{-nE(R,0)} \end{aligned}$$

where $E(R, 0) > 0$ for $R > R(0) = H(P)$. Therefore, the fidelity can be made arbitrarily close to 1 by increasing the block length n .

By the Converse to the Source Coding Theorem 4, no code for which $d(\mathcal{C}) \leq 0$ has rate smaller than $H(P)$. Thus for $R < H(P)$, we have $d(\mathcal{C}) = D > 0$. Therefore, the distortion $d(\mathbf{x}|\mathcal{C})$ remains strictly positive as n increases for a probabilistically large set of sequences $\mathbf{x}$. Consequently for the same set the fidelity $F(\mathcal{C})$ approaches 0. ■

REFERENCES

- [1] B. W. Schumacher, "Quantum coding," *Physical Review A*, vol. 64, 2001.
- [2] M. Horodecki, "Optimal compression for mixed signal states," *Phys. Rev. A*, vol. 57, pp. 3364–3369, 1998.
- [3] M. Horodecki, "Limits for compression of quantum information carried by ensembles of mixed states," *Phys. Rev. A*, vol. 61, 052309, 2001.
- [4] H. Barnum, C. M. Caves, C. A. Fuchs, R. Jozsa, and B. Schumacher, "On quantum coding ensembles of mixed states," *arXiv:quant-ph/0008024*.
- [5] W. Dür, G. Vidal, and J. I. Cirac, "Visible compression of commuting mixed states," *Phys. Rev. A*, vol. 51 pp. 2738–2747, 1995.
- [6] G. Kramer and S. A. Savari, "Quantum data compression of ensembles of mixed states with commuting density operators," *arXiv:quant-ph/0101119*.
- [7] M. Koashi and N. Imoto, "Compressibility of Mixed-State Signals," *arXiv:quant-ph/0103128*.
- [8] C. E. Shannon, "A mathematical theory of communication," *Bell Syst. Tech. J.*, vol. 27, no. 10, pp. 379–423, 623–656, Oct. 1948.
- [9] I. Csiszár, "The method of types," *IEEE Trans. Inform. Theory*, vol. 44, pp. 2505–2523, Oct. 1998.
- [10] I. Csiszár and J. Körner, *Information Theory: Coding Theorems for Discrete Memoryless Systems*. Budapest, Hungary: Akadémiai Kiadó, 1986.
- [11] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information*, New York: Cambridge Univ. Press, 2000.
- [12] G. Cohen, I. Honkala, S. Litsyn, and A. Lobstein, *Covering Codes*. The Netherlands: North Holland, 1997.
- [13] J. K. Omura, "Expurgated bounds, Bhattacharyya distance, and rate distortion functions," *Information and Control*, Vol. 24, pp. 358–383, 1974.
- [14] A. J. Viterbi and J. K. Omura, "Principles of Digital Communication and Coding," New York: McGraw-Hill, 1979.
- [15] C. E. Shannon, "Coding theorems for a discrete source with a fidelity criterion," *IRE National Convention Record*, Part 4, pp. 142–163, 1959.
- [16] T. Berger, *Rate Distortion Theory: A Mathematical Basis for Data Compression*, Englewood Cliffs, NJ: Prentice Hall, 1971.